



















60W Constant Voltage + Constant Current LED Driver











#### **Features**

- · Constant Voltage + Constant Current mode output
- Metal housing with class I design
- · Built-in active PFC function
- · Class 2 power unit
- IP67 / IP65 rating for indoor or outdoor installations
- Function options: output adjustable via potentiometer; 3 in 1 dimming; Timer dimming
- Typical lifetime > 62000 hours
- 7 years warranty

# Applications

- · LED street lighting
- LED high-bay lighting
- Parking space lighting
- · LED fishing lamp
- · LED greenhouse lighting
- Type "HL" for use in Class I, Division 2 hazardous (Classified) location.


#### GTIN CODE

MW Search: https://www.meanwell.com/serviceGTIN.aspx

# Description

HLG-60H series is a 60W AC/DC LED driver featuring the dual mode constant voltage and constant current output. HLG-60H operates from 90 ~ 305VAC and offers models with different rated voltage ranging between 15V and 54V. Thanks to the high efficiency up to 90.5%, with the fanless design, the entire series is able to operate for  $-40^{\circ}\text{C} \sim +80^{\circ}\text{C}$  case temperature under free air convection. The design of metal housing and IP67/IP65 ingress protection level allows this series to fit both indoor and outdoor applications. HLG-60H is equipped with various function options, such as dimming methodologies, so as to provide the optimal design flexibility for LED lighting system.

## Model Encoding



Type	IP Level	Function	Note
Blank	IP67	Io and Vo fixed	In Stock
Α	IP65	Io and Vo adjustable through built-in potentiometer	In Stock
В	IP67	3 in 1 dimming function (1~10VDC, 10V PWM signal and resistance)	In Stock
AB	IP65	Io and Vo adjustable through built-in potentiometer & 3 in 1 dimming function (1~10Vdc, 10V PWM signal and resistance)	In Stock
D	IP67	Timer dimming function, contact MEAN WELL for details(safety pending).	By request



#### **SPECIFICATION**


MODEL		HLG-60H-15	HLG-60H-20	HLG-60H-24	HLG-60H-30	HLG-60H-36	HLG-60H-42	HLG-60H-48	HLG-60H-54
	DC VOLTAGE	15V	20V	24V	30V	36V	42V	48V	54V
ОИТРИТ	CONSTANT CURRENT REGION Note.4	9 ~ 15V	12 ~ 20V	14.4 ~ 24V	18 ~ 30V	21.6 ~ 36V	25.2 ~ 42V	28.8 ~ 48V	32.4 ~ 54V
	RATED CURRENT	4A	3A	2.5A	2A	1.7A	1.45A	1.3A	1.15A
	RATED POWER	60W	60W	60W	60W	61.2W	60.9W	62.4W	62.1W
	RIPPLE & NOISE (max.) Note.2	150mVp-p	150mVp-p	150mVp-p	200mVp-p	200mVp-p	300mVp-p	300mVp-p	300mVp-p
	VOLTAGE AD L DANGE	Adjustable for A/AB-Type only (via built-in potentiometer)							
	VOLTAGE ADJ. RANGE	13.5 ~ 17V	17 ~ 22V	22 ~ 27V	27 ~ 33V	33 ~ 40V	40 ~ 46V	44 ~ 53V	49 ~ 58V
	OURDENT AR L DAVIGE	Adjustable for A	A/AB-Type only	(via built-in pot	entiometer)				
	CURRENT ADJ. RANGE	2.4 ~ 4A	1.8 ~ 3A	1.5 ~ 2.5A	1.2 ~ 2A	1 ~ 1.7A	0.87 ~ 1.45A	0.78 ~ 1.3A	0.69 ~ 1.15/
	VOLTAGE TOLERANCE Note.3	±2.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%
	LINE REGULATION	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%
	LOAD REGULATION	±1.5%	±1.0%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%
	SETUP, RISE TIME Note.6	500ms,80ms/1	15VAC 500m	s,80ms/230VA0			•		
	HOLD UP TIME (Typ.)	16ms / 115VAC	, 230VAC						
		90 ~ 305VAC 127 ~ 431VDC							
INPUT	VOLTAGE RANGE Note.5								
	FREQUENCY RANGE	47 ~ 63Hz							
		PF≧0.98/115V	AC, PF≧0.95/2	30VAC, PF≧0.9	92/277VAC @ ful	II load			
	POWER FACTOR (Typ.)	(Please refer to "POWER FACTOR (PF) CHARACTERISTIC" section)							
		THD< 20% (@ load≥60% / 115VAC,230VAC; @ load≥75% / 277VAC)							
	TOTAL HARMONIC DISTORTION	(Please refer t	o "TOTAL HARI	MONIC DISTOR	TION (THD)" se	ction)			
	EFFICIENCY (Typ.)	87.5%	89%	89.5%	90%	90%	90%	90.5%	90.5%
	AC CURRENT (Typ.)	0.64A / 115VAC	0.32A / 23	30VAC 0.3A	A / 277VAC	-	1	-	
	INRUSH CURRENT(Typ.)	COLD START 5	5A(twidth=265μs	measured at 50%	b Ipeak) at 230VAC	C; Per NEMA 410			
	MAX. No. of PSUs on 16A CIRCUIT BREAKER	9 units (circuit t	oreaker of type E	3) / 16 units (circ	cuit breaker of typ	pe C) at 230VAC			
	LEAKAGE CURRENT	<0.75mA / 277\	/AC						
	OVER CURRENT Note.4	95 ~ 108%							
		So 108%  Constant current limiting, recovers automatically after fault condition is removed							
	SHORT CIRCUIT	Hiccup mode, recovers automatically after fault condition is removed							
ROTECTION		18 ~ 24V	23 ~ 30V	28 ~ 35V	35 ~ 43V	41 ~ 49V	48 ~ 58V	54 ~ 65V	59 ~ 68V
	OVER VOLTAGE	Shut down o/p	voltage, re-powe	er on to recover					
	OVER TEMPERATURE	-	voltage, re-powe						
	WORKING TEMP.	•			ΓLOAD vs TEMF	PERATURE" sec	tion)		
	MAX. CASE TEMP.	Tcase= +80°C	(, ,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,				,		
	WORKING HUMIDITY	20 ~ 95% RH n	on-condensina						
NVIRONMENT	STORAGE TEMP., HUMIDITY	-40 ~ +80°C, 10							
	TEMP. COEFFICIENT	±0.03%/°C (0							
	VIBRATION			neriod for 72mi	n each along Y	V 7 avas			
	SAFETY STANDARDS Note.8	10 ~ 500Hz, 5G 12min./1cycle, period for 72min. each along X, Y, Z axes  UL8750(type"HL"), CSA C22.2 No. 250.0-08, BS EN/EN/AS/NZS 61347-1,BS EN/EN/AS/NZS 61347-2-13 independent, GB19510.1,GB19510.14,EAC TP TC 004,KC61347-1,KC61347-2-13(except for AB-type), IP65 or IP67 approved; J61347-1, J61347-2-13; design refer to BS EN/EN60335-1(by request)							
AFETY &	WITHSTAND VOLTAGE	I/P-O/P:3.75K	VAC I/P-FG:2	KVAC O/P-F	G:1.5KVAC				
MC	ISOLATION RESISTANCE					Н			
2	EMC EMISSION Note.8	I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25°C / 70% RH   Compliance to BS EN/EN55015, BS EN/EN61000-3-2 Class C (@ load ≥60%); BS EN/EN61000-3-3,GB/T 17743 , GB17625.1, EAC TP TC 020							
	EMC IMMUNITY	Compliance to BS EN/EN61000-4-2,3,4,5,6,8,11; BS EN/EN61547, light industry level (surge immunity Line-Earth 4KV, Line-Line 2KV),EAC TP TC 020							
	MTBF	3396.9K hrs mi	n. Telcordia S	SR-332 (Bellcore	) ;345.8K hrs mir	n. MIL-HDBK-2	217F (25°C)		
F	DIMENSION	171*61.5*36.8r	nm (L*W*H)				,		
	PACKING	0.73Kg; 20pcs/	15.6Kg/0.9CUF	Γ					
	1. All parameters NOT special	v mentioned are	measured at 2	30VAC input ra	ated current and	25°C of ambien	t temperature		

- 2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor.
- 3. Tolerance: includes set up tolerance, line regulation and load regulation.
- 4. Please refer to "DRIVING METHODS OF LED MODULE".
- 5. De-rating may be needed under low input voltages. Please refer to "STATIC CHARACTERISTIC" sections for details.
- 6. Length of set up time is measured at first cold start. Turning ON/OFF the driver may lead to increase of the set up time.
- 7. The driver is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again. (as available on https://www.meanwell.com//Upload/PDF/EMI\_statement\_en.pdf)
- 8. To fulfill requirements of the latest ErP regulation for lighting fixtures, this LED driver can only be used behind a switch without permanently connected to the mains.
- 9. This series meets the typical life expectancy of >62,000 hours of operation when Tcase, particularly (₺) point (or TMP, per DLC), is about 70℃ or less.
- 10. Please refer to the warranty statement on MEAN WELL's website at http://www.meanwell.com.
- 11. The ambient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft).
- 12. For any application note and IP water proof function installation caution, please refer our user manual before using. https://www.meanwell.com/Upload/PDF/LED\_EN.pdf
- 13. For A/AB type need to consider build in using to comply with Type HL application.
- XX Product Liability Disclaimer: For detailed information, please refer to https://www.meanwell.com/serviceDisclaimer.aspx




### ■ BLOCK DIAGRAM

Fosc: 100KHz

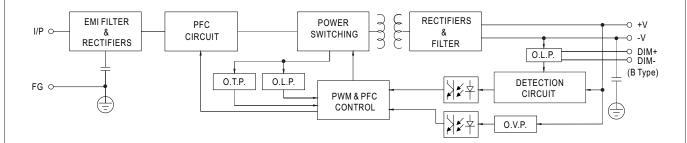

### ■ DRIVING METHODS OF LED MODULE

X This series is able to work in either Constant Current mode (a direct drive way) or Constant Voltage mode (usually through additional DC/DC driver) to drive the LEDs.




Typical output current normalized by rated current (%)

In the constant current region, the highest voltage at the output of the driver depends on the configuration of the end systems.

Should there be any compatibility issues, please contact MEAN WELL.




## ■ DIMMING OPERATION




#### imes 3 in 1 dimming function (for B/AB-Type)

- $\cdot \ \mathsf{Output} \ \mathsf{constant} \ \mathsf{current} \ \mathsf{level} \ \mathsf{can} \ \mathsf{be} \ \mathsf{adjusted} \ \mathsf{by} \ \mathsf{applying} \ \mathsf{one} \ \mathsf{of} \ \mathsf{the} \ \mathsf{three} \ \mathsf{methodologies} \ \mathsf{between} \ \mathsf{DIM+} \ \mathsf{and} \ \mathsf{DIM-} \mathsf{ind} \ \mathsf{one} \ \mathsf{one$ 
  - 1 ~ 10VDC, or 10V PWM signal or resistance.
- Direct connecting to LEDs is suggested. It is not suitable to be used with additional drivers.
- Dimming source current from power supply:  $100\mu A$  (typ.)
- O Applying additive 1 ~ 10VDC




"DO NOT connect "DIM- to -V"

O Applying additive 10V PWM signal (frequency range 100Hz ~ 3KHz):





"DO NOT connect "DIM- to -V"


O Applying additive resistance:



"DO NOT connect "DIM- to -V"











Note: In the case of turning the lighting fixture down to 0% brightness, please refer to the configuration as follow, or please contact MEAN WELL for other options.

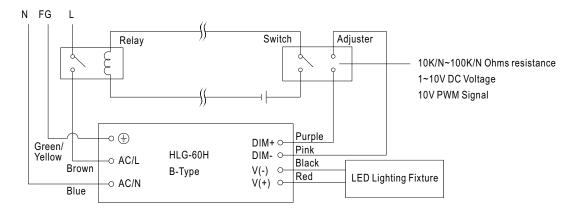


Using a switch and relay can turn  $\ensuremath{\mathsf{ON}}\xspace(\ensuremath{\mathsf{OFF}}\xspace$  the lighting fixture.



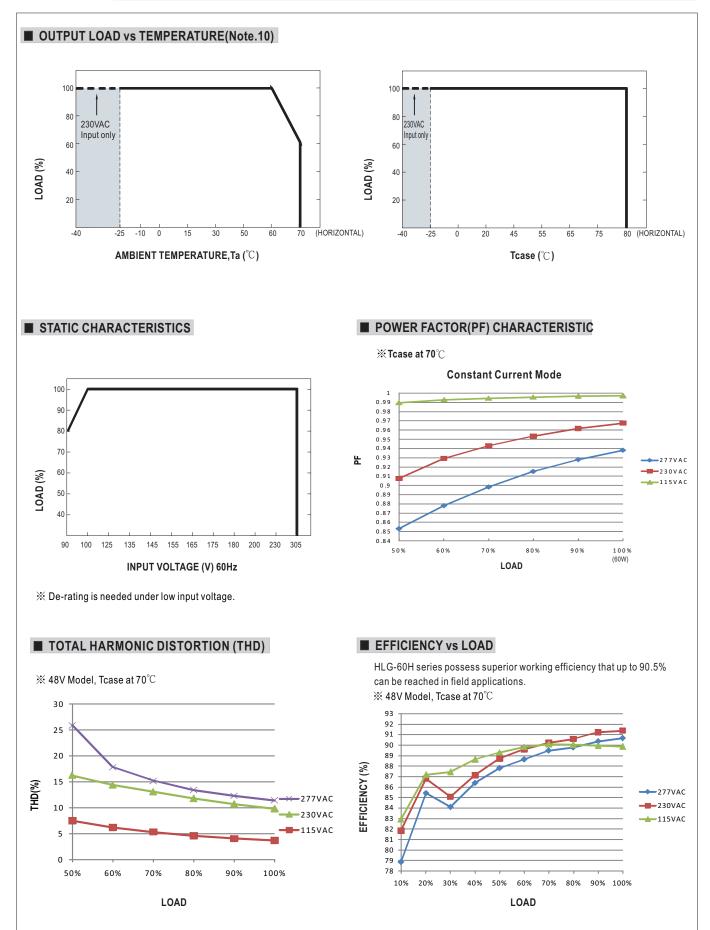





# ■ LIFE TIME

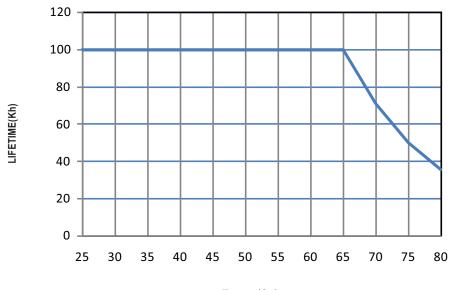



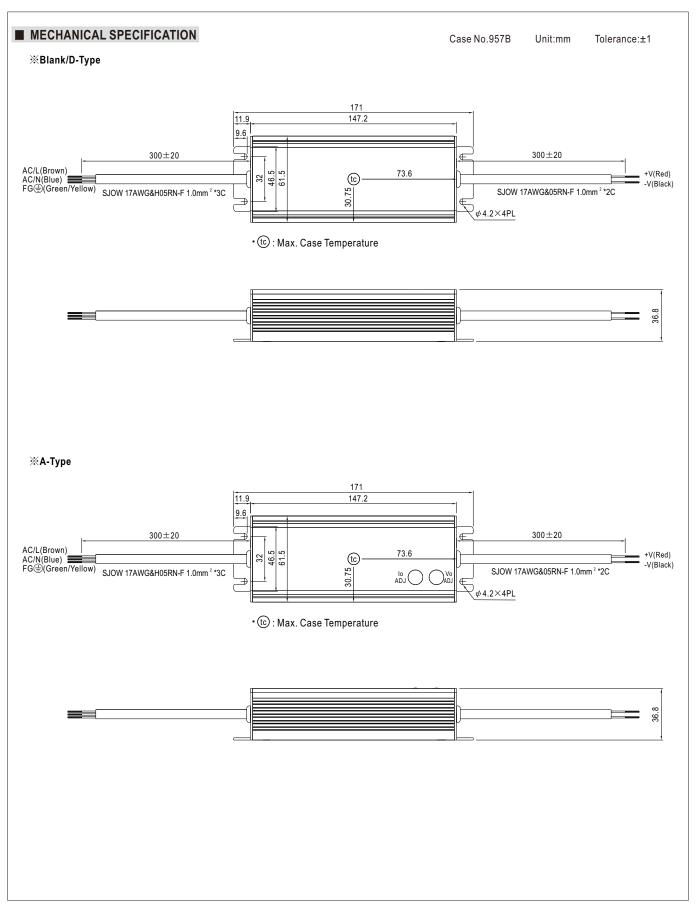



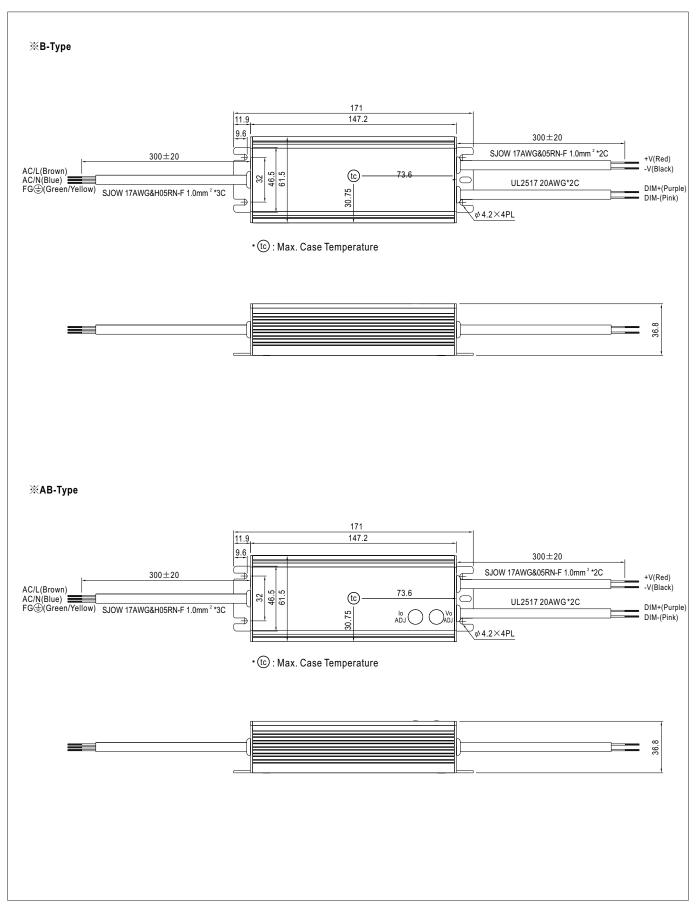




#### **■ WATERPROOF CONNECTION**


### Waterproof connector

Waterproof connector can be assembled on the output cable of HLG-60H to operate in dry/wet/damp or outdoor environment.




Size	Pin Configuration (Female)			
M12	000	<u></u>		
IVIIZ	4-PIN	5-PIN		
	5A/PIN	5A/PIN		
Order No.	M12-04	M12-05		
Suitable Current	10A max.	10A max.		

Size	Pin Configuration (Female)		
M15	00		
IVITO	2-PIN		
	12A/PIN		
Order No.	M15-02		
Suitable Current	12A max.		



#### ※ Cable Joiner

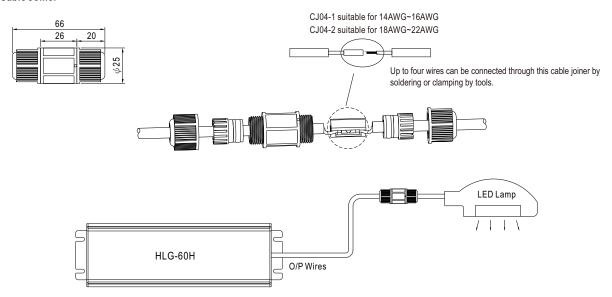

© CJ04 cable joiner can be purchased independently for user's own assembly. MEAN WELL order No.: CJ04-1, CJ04-2.

### ■ INSTALLATION MANUAL

Please refer to: http://www.meanwell.com/manual.html